

quotes@motioncomposites.com orders@motioncomposites.com www.motioncomposites.com



NC

Helio KIDS

1- Purchasing i	information
-----------------	-------------

P.O. number:*		Date:	
Company Name: *			
Purchasing contact:*			
Phone:*			
Email:*			
Contact preference:*	Phone 🗆	Email 🗆	
Marked for:			

3- Shipping information Manitoba Wheelchair Program Ship to:* Name: 1857 Notre Dame Ave. Address: Wpg MB City: Province: Postal Code: R3E 3E7 Phone: 204-975-3250

NC = NO CHARGE (option available through Manitoba Possible)

J = JUSTIFICATION REQUIRED (provide clinical rationale)

OTP = OPTION TO PURCHASE (client responsible for cost)

N/A = NOT AVAILABLE (option not available through Manitoba Possible)

		MA080		
* Required		English Manual (STD)		Taxes not included
MODEL				
WC06		Ultralight Folding Carbon Fiber Helio KIDS Wheelchair Including fixed seat depth OR depth adjustable back (175 lb weight capacity)		
WC10		E-Motion adaptor Kit (2 adaptors) - Only necessary with 6° camber		OTP
		FREE Growth Kit within the first 5 years of the Helio KIDS wheelchair o	wnership	
		The growth kit includes carbon crossbraces, crossbrace links, seat sling, back upholstery, fron	t riggings and footplates.	
SEAT WIDT	Ή			
SW/		12"		NC

15" 🗆

16" 🗆

SW				12" 🗆		13" 🗆]	14" 🗆		
1. Width Calculo	ator	-		↓ Ca	ution:	comp	lete onl	y one	of the follow	/i
SEAT DEPTH	l (Availal	ble with V	VC-19)							1
SD12		12" Seat	sling - fr	ame of 14	<i>t"</i>			NC		
SD13		13" Seat	sling - fra	ame of 14	<i>t</i> "			NC		Ì
SD14		14" Seat	sling - fra	ame of 14	<i>t</i> ″			NC		ļ
SD15		15" Seat	sling - fr	ame of 15	;"			NC		ļ
SD16		16" Seat	sling - fr	ame of <i>16</i>	;"			NC	1	ļ
FIXED BACK	CANE (M	1UST select	ONE pus	h handle o	ptions)					ļ
BC11-1215		Aluminiu	um straig	ht back ca	ine (90°)		12 - 15"	NC		
BC11-1518		Aluminiu	um straig	ht back ca	ine (90°)		15 - 18"	NC]	
BC11-1821		Aluminiu	um straig	ht back ca	ine (90°)	- STD	18 - 21"	NC]	Ì
BC12-1315		Aluminu	m back c	ane 8° bei	nd		13.5 - 15"	NC		
BC12-1518		Aluminu	m back c	ane 8° bei	nd		15 - 18"	NC]	
BC12-1821		Aluminu	m back c	ane 8° bei	nd -STD		18 - 21"	NC		
Specify heigh	ht: ⁵		measurec	l from seat	sling to to	op of back	upholstery		1	
ANGLE ADJU		BACK CA	NE <i>(MUST</i>	select ON	E push ha	ndle optio	ons)			
BC13-1518		Aluminiu	um straig	ht back ca	ine (90°)		15 - 18"	NC]	
BC13-1821		Aluminiu	um straig	ht back ca	ine (90°)	- STD	18 - 21"	NC		I
BC14-1518		Aluminu	um back o	cane 8° be	end		15 - 18"	NC		
BC14-1821		Aluminu	um back d	cane 8° be	end -STD		18 - 21"	NC		
Select angle	for the b	ack cane:		85° □	90° □	95° STD				
				100° 🗆	105° □		110° 🗆			
Specify heigh	ht: ⁵								1	

5- If not indicated, default height setting is at the lowest position

15 🗆		10 🗅	_				
ving two	sectio	ns 🗸					
SEAT DEPT	H- Dept	h and angle adusta	ble (Not a	wailable with W	/C-19) ³		1
SD14		12" to 15" (seat sl	ing/frame	e 14")			NC
SD15		13" to 16" (seat sl	ing/frame	e 15")			NC
SD16		14" to 17" (seat sl	ing/frame	2 16")			NC
SD17		15" to 18" (seat sl	ing/frame	2 17")			NC
SD18		16" to 19" (seat sl	ing/frame	2 18")			NC
Specify de	pth: ⁴						
4 - If not ind	licated, th	of 175 lb with a dept he depth will be equal Depth adjustment	to the sea	t sling Depth adjustment	⊂ nush handle onti	ions)	
BC15-912		Aluminium straigh			- push nunuic opti	onsy	NC
BC15-1215		Aluminium straigh					NC
BC15-1518		Aluminium straigh					NC
BC15-1821		Aluminium straigh	t back car	ne 18 - 21" STD			NC
BC16-1215		Aluminum back ca	ne 8° ben	d 12 - 15"			NC
BC16-1518		Aluminum back ca	ne 8° ben	d 15 - 18"			NC
BC16-1821		Aluminum back ca	ne 8° ben	d STD 18 - 21"			NC
Select angl	e for the	back cane:		90° □	95° STD 🗆	100° 🗆	105° 🗆
Specify he	ight : ⁵						
						N	NC
							J

AC05-S WC-19 Transit Tie Down w/Q'straint belt ⁷ Short belt 20"-41" Short belt 20"-41" MC05-L WC-19 Transit Tie Down w/Q'straint belt⁷ Long belt 20"-46" MC05-L WC-19 Transit Tie Down w/Q'straint belt⁷ Long belt 20"-46" MC05-L MC05-L WC-19 Transit Tie Down w/Q'straint belt⁷ Long belt 20"-46" MC05-L WC-19 Transit Tie Down w/Q'straint belt⁷ Long belt 20"-46" MC05-L WC-19 Transit Tie Down w/Q'straint belt⁷ MC05-L WC-19 Transit Tie Down w/Q'straint belt⁷ Long belt 20"-46" MC05-L WC-19 Transit Tie Down w/Q'straint belt⁷ MC05-L WC-19 Transit Tie Down w/Q'straint belt⁷ 	TRANSIT TIE	DOWN			
AC05-L □ WC-19 Transit Tie Down w/Q'straint belt ⁷ Long belt 20"-46"	AC04		Transit Tie Down (Unoccupied) ⁶		NC
	AC05-S		WC-19 Transit Tie Down w/Q'straint belt ⁷ Short belt 20"-41"		J
	AC05-L		WC-19 Transit Tie Down w/Q'straint belt ⁷ Long belt 20"-46"		J
AC35 D WC-19 Transit Tie Down without belt	AC35		WC-19 Transit Tie Down without belt ⁷		NC

6- required when ordering HD; 7- Not available with depth adjustable back

Helio Kids FRONT Seat-to-floor Height - Please select your choice

		3"	caster (O	TP)	4"	caster (O	TP)		5" caster (I)	6'	' caster (N	C)	7"	caster (O	TP)	8	" caster (N	IC)
		Ste	m bolt Ler	ngth	Ste	m bolt Ler	ngth	Ste	em bolt Ler	ngth	Ste	m bolt Len	gth	Ste	m bolt Len	igth	Ste	m bolt Lei	ngth
orks / Positi	ion	STD	+1"	+2"	STD	+1"	+2"	STD	+1"	+2"	STD	+1"	+2"	STD	+1"	+2"	STD	+1"	+2"
	P1	13"	14"	15"	13 1/2"	14 1/2"	15 1/2"												
4"	P2	13 1/2"	14 1/2"	15 1/2"	14"	15"	16"	14 1/2"	15 1/2"	16 1/2"									
	P1																		
5"	P2				14"	15"	16"	14 1/2"	15 1/2"	16 1/2"									
5	P3	14"	15"	16"	14 1/2"	15 1/2"	16 1/2"	15"	16"	17"	15 1/2"	16 1/2"	17 1/2"						
	P4	14 1/2"	15 1/2"	16 1/2"	15"	16"	17"	15 1/2"	16 1/2"	17 1/2"	16"	17"	18"	16 1/2"	17 1/2"	18 1/2"			
	P1										16 1/2"	17 1/2"	18 1/2"	17"	18"	19"			
	P2							16 1/2"	17 1/2"	18 1/2"	17"	18"	19"	17 1/2"	18 1/2"	19 1/2"			
7"	P3							17"	18"	19"	17 1/2"	18 1/2"	19 1/2"	18"	19"	20"	18 1/2"	19 1/2"	20 1/2
	P4	16 1/2"	17 1/2"	18 1/2"	17"	18"	19"	17 1/2"	18 1/2"	19 1/2"	18"	19"	20"	18 1/2"	19 1/2"	20 1/2"	19"	20"	21"
	P5	17"	18"	19"	17 1/2"	18 1/2"	19 1/2"	18"	19"	20"	18 1/2"	19 1/2"	20 1/2"	19"	20"	21"	19 1/2"	20 1/2"	21 1/2
eight availabi	le +- 1/4" (s	see stem bolt	and fork co	ombination	at the end o	f the order ;	form)			1									·
CASTERS																Availabilit	У		

CASTERS			Availability	
CA01-03 to		Composite wheel w/ PU tire (1")	3", 4", 5", 6", 7", 8"	NC
CA01-08			- , , - , - , -	
CA10 to		Pneumatic casters (1 ¼")	6", 8"	OTP
CA11		Fileumatic casters (1 /4)	0,0	011
CA14 to		Newton UltraCaster Composite (1 ½ ")	4", 5", 6"	
CA16			4,5,6	L
CA17 to		Newton UltraCaster Aluminum (1 ½ ")	4", 5", 6"	OTP
CA19		Newton Ottacaster Aluminum (172)	4,3,0	011
CASTER OPT	TIONS			
CA12		Caster Pin Locks (Available with +1" or +2" Stem bolt ONLY) ¹		OTP
CA13		Carbon fiber Frog Legs suspension forks (Not available with caster pin locks)		OTP

1- Not available with WC-19

KIDS REAR Seat-to-floor Height

	WHEEL SIZES		He	eight available	
	20" (451) wheel (NC)	12 1/2	to	17 1/4	Specify desired height:
	22" (501) wheel (NC)	13 1/2	to	18 1/4	
	24" (540) wheel (NC)	14 1/2	to	19 1/4	
Note: Tire	size, center of gravity setting and se	eat slope may	result ir	n a variation of +/- ½" of selected sec	at to floor height"

		Footres	t		
SWING-IN/S	SWING-C	DUT FOOTREST			
FR03-01		60° Swing-in/swing-out footrest - 13.5" - 17"		Set at: *	OTP
FR03-02		60° Swing-in/swing-out footrest - 14.5" - 19.5"		Set at: *	OTP
FR03-03		60° Swing-in/swing-out footrest - 15.5" - 20.5"		Set at: *	OTP
FR04-01		70° Swing-in/swing-out footrest - 13.5" - 17"		Set at: *	NC
FR04-02		70° Swing-in/swing-out footrest - 14.5" - 19.5"		Set at: *	NC
FR04-03		70° Swing-in/swing-out footrest - 15.5" - 20.5"		Set at: *	NC
FR15-01		80° Swing-in/swing-out footrest - 13.5" - 16" 5		Set at: *	NC
FR15-02		80° Swing-in/swing-out footrest - 14.5" - 19.5" 5		Set at: *	NC
FR15-03		80° Swing-in/swing-out footrest - 15.5" - 20.5" 5		Set at: *	NC
FR06		90° swing-in/swing-out with front mount - Standard (no extension) ¹	7.5" - 11"	Set at: *	NC
FR07		90° swing-in/swing-out with front mount - Short extension 2" 1, 2	9.5"- 13"	Set at: *	NC
FR08		90° swing-in/swing-out with front mount - Medium extension 4" $^{\rm 1,2}$	9.5" - 14.5"	Set at: *	NC
FOOTREST	OPTION	5			
FR09		High mount (footplate attached to the hanger with clamps) ³	5" - 13.5"	Set at:*	NC
FR10		Elevating legrest with calf pad, Length adjustable ⁴ Left Right Right	14" - 22"	Set at:	J
FR99		Omit Footrest			L

* + or - 1/2"

I- Available only with two piece adjustable footplates;
 I- Available only with two piece adjustable footplates;
 The elevating legrest replace the footrest side selected; Not compatible with seat width of 12" and 13" and one piece footplate;
 Source State State

FOOTPLATE	c				
FP01		Standard - Composite ¹		NC	
FP02		Newton adjustable angle - Composite		J	
FP03		Newton adjustable angle - Aluminum ²		OTP	
FP04		Newton adjustable angle - Carbon fiber (with rubber inserts)		OTP	
FP23		Newton adjustable angle extra deep - Aluminum		J	
FP06		One piece adjustable angle flip-up - Aluminum		OTP	
FP07		One piece adjustable angle flip-up - Carbon fiber (with rubber inserts)		OTP	
FOOTPLATE				011	
FP08		Length adjustable heel loop (not available with one piece footplate)		NC	
FP09		Calf strap		OTP	
FP30		Bodypoint Aeromesh Padded calf strap		OTP	
1- Not availa		ront mount; 2 - The Newton adjustable angle (Aluminum) is the only available option with a 12 and 13" wide frame			
SWING AW	AY RESID	UAL LIMB SUPPORT			
FR27		Residual limb support - flat 6"x8" Left Right Right		OTP	
FR28		Residual limb support - flat 8"x10" Left Right Right		OTP	
FR29		Residual limb support - flat 10"x10" Left Right Right		OTP	
FR30		Residual limb support - flat 10"x14" Left □ Right □		OTP	
FR32		Residual limb support - contour 6"x8" Left Right Right		OTP	
FR33		Residual limb support - contour 8"x10" Left Right Right		OTP	
PUSH HAND	DLES OPT	ONS (ONE option at a time)			
PH01		Push handles		NC	
PH05		Fold down push handles ¹		OTP	
PH06-920		Clamp on height adjustable push handles 9" - 20" 1.2		OTP	
PH06-923		Clamp on height adjustable push handles 9" - 23" 1.2		OTP	
PH02		Omit push handles		l	
STROLLER H	ANDLE A	ND STABILIZER BAR (only available with push handle)			
PH04		Stroller handle		NC	
PH03		Newton folding stabilizer bar (not available with stroller handle)		OTP	
		stroller handle, stabilizer bar, headrest and attendant lock; 2- Not compatible with depth adjustable back, 8° bend back canes and an	nputee axle plates		
BACK UPHO BH07		Clin on Active Mach back unbelstony		NC	
BH07 BH08		Slip-on Active-Mesh back upholstery		OTP	
вное ВН99		Adjustable tension Active-Mesh back upholstery Omit Back upholstery		NC	
61199		NXT back Support	See pricelist	OTP	
SEAT CUSHI			See pricesse		
SC01		2" Cushion		OTP	
SC02		3" Cushion		OTP	
SC99		Omit seat cushion		NC	
		NXT cushion		See price list OTP	
	1	Rear wheels			
ONE ARM D	DRIVE ¹	Only available with Newton One rear wheels, permanent axles, 0° camber			
HR22		One arm drive - aluminum inner handrim ² 24" Left D Right D		J	
HR60		One arm drive - plastic coated inner handrim ² 24" Left D Right D		OTP	
HR98		Omit handrim on opposite side of the One Arm Drive (OAD)		OTP	
REAR WHEE	ELS		Available		
RW01		Mag ³	20", 22" 24"	OTP	
RW02		Newton One - spoke wheel ⁴	20", 22" 24"	NC	
RW03		Newton Gravity - ultralight wheel	20", 22", 24"	OTP	
RW04		Spinergy Spox Blk STD Wht ⁵ Blue ⁵ Red ⁵ Yel ⁵	22", 24"	OTP	
RW05		Spinergy LX Bik STD = Pur ⁵ = Wht ⁵ = Blue ⁵ = Red ⁵ = Yel ⁵ = Pink ⁵ = Grn ⁵ = Org ⁵ =	22", 24"	OTP	
RW07		Spinergy CLX ⁶ Bik STD \square Pur ⁵ \square Wht ⁵ \square Blue ⁵ \square Red ⁵ \square Yel ⁵ \square Pink ⁵ \square Grn ⁵ \square Org ⁵ \square	24"	OTP	
TIRES		Solid	Available		
TI01		Soft Urethane 1 3/8"	20", 22" 24"	NC	
TI01		Soft Urethane 1 3/8	20", 22" 24	OTP	
TI02		Soft Urethane knobby 1 3/8" Soft Urethane 1" - Shox	22", 24"	OTP	
1104		Pneumatic	,		
TI05		Pneumatic 1 3/8"	20", 22", 24"	NC	
		Pneumatic with Airless insert 1 3/8" ⁸	22", 24"	OTP	
TI08			· · · · ·		
TI08 TI06			20", 22", 24"	OTP	
TI08 TI06 TI07		Pneumatic HP, Low Tread, Puncture resistant, black 1" - <i>SpeedLite</i> Pneumatic HP, Medium Tread, Puncture resistant, black 1" - <i>TrailBlazer</i>	20", 22", 24" 24"	OTP 0TP	

Offered with handrims on each side of the wheelchair; Select outer handrim in the handrims section;
 Not compatible with HP tires; Only available with duminum or plastic coated handrim, standard position;
 Not compatible with Shox tires;
 Colour spokes require an additionnal 10 days lead-time;
 Only available with 1" tires;
 The 22" is only available with Mags and Newton One rear wheels;

8- Not available with Spinergy CLX

		Handrims		
IANDRIM			Available	
HR01		Aluminum anodized	20", 22", 24"	NC
HR61		Aluminum black hard anodized ²	20", 22", 24"	OTP
HR02		Plastic coated ¹	20", 22", 24"	OTP
HR03		High friction coated ^{1,2,3}	22", 24"	OTP
R07-HR18 and IR65-HR71		Newton Air Grip ² See on page 6 for color choice and price	20", 22", 24"	L
HR28		Surge ^{1,2,3} (1 1/2" Oval handrim w/ Gripton high friction strip)	22", 24"	OTP
HR05		Surge LT ^{1,2,3} (1 1/8" Oval handrim w/ Gripton high friction strip)	22", 24"	OTP
HR04		Natural Fit ^{1,2,3}	22", 24"	OTP
HR62		Simi H ^{1,2,3} (1 1/4" Oval handrim with high friction strip)	22", 24"	OTP
HR63		Nova H ^{1,2,3} (1 1/4" Oval handrim with high friction strip)	22", 24"	OTP
HR64		Optimum H ^{1,2,3} (1 1/8" heart-shaped handrim)	22", 24"	OTP
HR99		Omit handrim		N/A
- Only stan	dard and	narrow handrim position. By default, the tab won't be cut with the narrow position; 2- Not available with Mag wheels; 3 - Not available	with one arm drive;	
	DOCITIO	Handrims option		
SSEMBLY I HR29				NC
HR030		Standard Handrim position Full tab Narrow Handrim position no cut Full tab		NC
HR030		Narrow Handrim position no cut run du Narrow Handrim position with cut ³ Short tab 2 positions		J
HR31		Narrow Handrim position with cut Short tab 2 positions Super Narrow Handrim ³ Short tab 2 position STD Short tab 1 position		1
		Super Narrow Handrim Short to 2 positions Sto 1 Short to 2 position Sto 1		,
HR23		Standard grip		OTP
HR27		Super grip		OTP
HR099		Omit thumb piece		NC
	able with	Aluminum and Air Grip handrims;		
XLE ¹				
AX01		Quick release axle		NC
		Permanent axle		NC
AX02				
AX03		Quad release axle		OTP
AX03 AXLE PLATE				
AX03 AXLE PLATE AX04		Amputee adjustable axle plate ²		OTP
AX03 AXLE PLATE AX04	red with o	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available		
AX03 AXLE PLATE AX04 I- Not requir	red with o	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available		
AX03 AXLE PLATE AX04 I- Not requir REAR WHEE	red with a	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER		ОТР
AX03 AXLE PLATE AX04 I- Not requir REAR WHEE CM00	ed with o	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber		OTP NC
AX03 AXLE PLATE AX04 L- Not requir REAR WHEE CM00 CM03	red with a	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 3° camber 6° camber (not available with amputee axle plate)		NC NC
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06	red with a	Amputee adjustable axle plate 2 ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 6° camber (not available with amputee axle plate)		NC NC
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06	red with a	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 6° camber (not available with amputee axle plate) Choose position of rear wheel axle plate:		NC NC
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06	red with a	Amputee adjustable axle plate 2 ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 6° camber (not available with amputee axle plate)		NC NC
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06	red with a	Amputee adjustable axle plate ² are arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 6° camber (not available with amputee axle plate) Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver.		NC NC
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06	red with a	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 6° camber (not available with amputee axle plate) Choose position of rear wheel axle plate:	1/4" 1/2" 3/4" 4 "	NC NC
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06	red with a	Amputee adjustable axle plate ² are arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 6° camber (not available with amputee axle plate) Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver. Most stable	1/4" 1/2" 3/4" 4 " 	NC NC
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06	red with a	Amputee adjustable axle plate ² are arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 6° camber (not available with amputee axle plate) Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver. X = Most stable AMPUTEE 1" 1/4" 1/2" 3/4" 2" 1/4" 1/2" 3/4" 3"		NC NC
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06	red with a	Amputee adjustable axle plate ² are arm drive 2: May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 6° camber (not available with amputee axle plate) 7 Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver. X = Most stable AMPUTEE 1" 1/4" 1/2" 3/4" 2" 1/4" 1/2" 3/4" 3" If not indicated, default setting is at 1.5" Possible conflict between a seat depth under 16" and a center of gravity over 2.5".		NC NC
AX03 AXLE PLATE AX04 I- Not requir REAR WHEE CM00 CM03 CM06	red with a	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available O° camber 3° camber 3° camber 6° camber (not available with amputee axle plate) Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver. X X Image: Most stable Image: May interfere with swing away armrest, dept adjustable back and limit seat to floor height available Background and the amputee axle plate) X Image: Most stable Image: May interfere with amputee axle plate: Measure distance X from front of back post to center of axle receiver. X = Most stable Image: May interfere and interfere and interfere and interfere and a center of gravity over 2.5". Motion Composites will select the closest possible center of gravity (COG) if an issue arises with and the closest possible center of gravity (COG) if an issue arises with and the closest possible center of gravity (COG) if an issue arises with and the closest possible center of gravity (COG) if an issue arises with and the closest possible center of gravity (COG) if an issue arises with and the closest possible center of gravity (COG) if an issue arises with and the closest possible center of gravity (COG) if an issue arises with and the closest possible center of gravity (COG) if an issue arises with and the		NC NC
AX03 AXLE PLATE AX04 - Not require CM00 CM03 CM06 :ENTER OF	ced with o	Amputee adjustable axle plate ² are arm drive 2: May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 6° camber (not available with amputee axle plate) 7 Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver. X = Most stable AMPUTEE 1" 1/4" 1/2" 3/4" 2" 1/4" 1/2" 3/4" 3" If not indicated, default setting is at 1.5" Possible conflict between a seat depth under 16" and a center of gravity over 2.5".		NC NC
AX03 XLE PLATE AX04 - Not requir (AR WHEE CM00 CM03 CM06 (ENTER OF	red with a	Amputee adjustable axle plate ² nee arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available C* Camber 3* camber 6* camber (not available with amputee axle plate) Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver. X If not indicated, default setting is at 1.5" Possible conflict between a seat depth under 16" and a center of gravity over 2.5". Motion Composites will select the closest possible center of gravity (COG) if an issue arises with 1-Only available with the amputee axle plate		OTP NC NC NC
AX03 XLE PLATE AX04 - Not requir CM00 CM03 CM06 ENTER OF VHEEL LOC WL08	CAMB GRAVIT	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available 0° camber 3° camber 6° camber (not available with amputee axle plate) Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver. X Most stable AMPUTEE 1" 1/4" 1/1 1/2" 3/4" 2" 1/4" 1/1 1/2" 1/1 1/4" 1/1 1/4" 1/1 1/4" 1/1 1/4" 1/2 3/4" 3" 1 1/1 1/2" 3/4" 2" 1/1 1/4" 1/2 1/4" 1/2 1/4" 1/2 1/4" 1/2 1/4" 1/2 1/4" 1/2 1/4" 1/3 1/4" 1/4 1/2" 1/4 1/4"		OTP NC NC NC NC
AX03 XLE PLATE AX04 - Not requir CM00 CM03 CM06 CM06 CM06 CM06 CM06 WHEELLOC WHEELLOC WL08 WL14	CAMB	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available O' camber 3' camber 3' camber 6' camber (not available with amputee axle plate) Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver. X Most stable MMPUTEE 1" 1/4" 1/2" 3/4" 3" If not indicated, default setting is at 1.5" Possible conflict between a seat depth under 16" and a center of gravity over 2.5". Motion Composites will select the closest possible center of gravity (COG) if an issue arises with 1-Only available with the amputee axle plate Newton Wheel lock - push to lock 6" removable extension handle for push to lock		OTP NC NC NC NC
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06 ENTER OF SENTER OF WHEEL LOC WL08 WL14 WL16	CAMB	Amputee adjustable axle plate 2 ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available ER 0° camber 3° camber 6° camber (not available with amputee axle plate) 6° camber (not available with amputee axle plate) Measure distance X from front of back post to center of axle receiver. X = Most stable AMPUTEE 1 If not indicated, default setting is at 1.5" Possible conflict between a seat depth under 16" and a center of gravity over 2.5". Motion Composites will select the closest possible center of gravity (COG) if an issue arises with 1-Only available with the amputee axle plate Newton Wheel lock - push to lock 6" removable extension handle for push to lock Aluminum push to lock with extensions		OTP NC NC NC NC NC NC NC OTP
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06 ENTER OF SENTER OF WHEEL LOC WL08 WL14 WL16 WL02	Canal	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available B 0° camber 3° camber 6° camber (not available with amputee axle plate) 6° camber (not available with amputee axle plate) Image: Choose position of rear wheel axle plate: Most stable Measure distance X from front of back post to center of axle receiver. X = Most stable Image: Ampute the ampute to any or the ampute the ampute the asset depth under 16" and a center of gravity over 2.5". Motion Composites will select the closest possible center of gravity (COG) if an issue arises with 1-Only available with the amputee axle plate Newton Wheel lock - push to lock 6" removable extension handle for push to lock Aluminum push to lock with extensions Pull to lock		OTP NC NC NC NC NC NC NC NC NC NC
AX03 AXLE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06 ENTER OF SENTER OF WHEEL LOC WL08 WL14 WL16 WL02 WL04	K	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available 0° camber 3° camber 3° camber 6° camber (not available with amputee axle plate) Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver. X = Most stable AMPUTEE 1 1 1/2" 1 1/4" 1		OTP NC OTP NC OTP NC OTP
AX03 AXUE PLATE AX04 - Not requir REAR WHEE CM00 CM03 CM06 ENTER OF SENTER OF WHEEL LOC WL08 WL14 WL16 WL02 WL04 WL13	K	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available Choose position of rear wheel axle plate: 6° camber (not available with amputee axle plate) Most stable Most stable Most stable Amputet If not indicated, default setting is at 1.5" Possible conflict between a seat depth under 16" and a center of gravity over 2.5". Motion Composites will select the closest possible center of gravity (COG) if an issue arises with 1-Only available with the amputee axle plate Newton Wheel lock - push to lock 6" removable extension handle for push to lock Aluminum push to lock (works best with pneumatic or high pressure tire) 6" removable extension handle for pull to lock and grade aid		OTP NC OTP NC OTP
AX03 AXLE PLATE AX04 L- Not requir REAR WHEE CM00 CM03 CM06 CENTER OF CENTER OF WHEEL LOC WL08 WL14 WL14 WL16 WL02 WL04 WL13 WL05	K	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available O° camber 3° camber O° camber 6° camber (not available with amputee axle plate) Choose position of rear wheel axle plate: Measure distance X from front of back post to center of axle receiver. Most stable May ure to the stable 11° 1/4° 1/2° 3/4° 2° 1/4° 1/2° 3/4° 3° If not indicated, default setting is at 1.5″ Possible conflict between a seat depth under 16″ and a center of gravity over 2.5″. Motion Composites will select the closest possible center of gravity (COG) if an issue arises with 1-Only available with the amputee axle plate Newton Wheel lock - push to lock 6° removable extension handle for push to lock Aluminum push to lock with extensions Pull to lock Newton grade aid push to lock (works best with pneumatic or high pressure tire) 6° removable extension handle for pull to lock and grade aid		OTP NC NC NC NC NC NC NC NC OTP NC OTP OTP
AX03 AXLE PLATE AX04 L- Not requir REAR WHEE CM00 CM03 CM06 CENTER OF CENTER OF CENTER OF WL08 WL14 WL16 WL02 WL04 WL13	K	Amputee adjustable axle plate ² ne arm drive 2- May interfere with swing away armrest, dept adjustable back and limit seat to floor height available Choose position of rear wheel axle plate: 6° camber (not available with amputee axle plate) Most stable Most stable Most stable Amputet If not indicated, default setting is at 1.5" Possible conflict between a seat depth under 16" and a center of gravity over 2.5". Motion Composites will select the closest possible center of gravity (COG) if an issue arises with 1-Only available with the amputee axle plate Newton Wheel lock - push to lock 6" removable extension handle for push to lock Aluminum push to lock (works best with pneumatic or high pressure tire) 6" removable extension handle for pull to lock and grade aid		OTP NC OTP NC OTP NC OTP

 WL99
 Image: Omit wheel locks

 1- For more information about incompatibilities and restriction, refer to the table at page 6 and the "How-to documents" page of our website:

https://www.motioncomposites.com/en_ca/support-and-education/how-to-documents

SIDE GUARDS OPTION SG07

POSITIONING BELT SB01-S

SB01-L

SB02-S

SB02-L

SB04-M

SB04-L

SB05-S

SB05-M

SB05-L

SB06-S

Side guards clip (pair)

1- only compatible with 0 $^{\circ}$ camber; Increase distance between fender side guards by 1 1/8" ;

BodyPoint Hip Belt - 2 point not padded - Medium 56"

BodyPoint Hip Belt - 2 point not padded - Long 61"

BodyPoint Hip Belt - 2 point padded - Medium 56"

BodyPoint Hip Belt - 2 point padded - Small 51"

BodyPoint Hip Belt - 2 point padded - Long 61"

BodyPoint Hip Belt - 4 point padded - Small 51"

Velcro adjustable - Standard 35"

Velcro adjustable - Long 60"

Auto buckle - Standard 35"

Auto buckle - Long 60"

ilablo with Ma whools late and WC-19 transit tie-down

3- Not available with Mag	g wheels and Spinergy;	4- Not compatible with	swing away armrest or	amputee axle pla

SB06-M		BodyPoint Hip Belt - 4 point padded - Medium 56"		OTP		
SB06-L		BodyPoint Hip Belt - 4 point padded - Long 61"				
SB03		Hardware attachment for 2 extra points (1 pair)		OTP		
SB08-M		BodyPoint EVOFLEX® Positioning Belt Rehab latch and Band Clamps - Medium 18"				
SB08-L		BodyPoint EVOFLEX® Positioning Belt Rehab latch and Band Clamps - Long 24"		OTP		
SB99		Omit positioning belt		NC		
HEADREST ¹	1					
AC01-S		Profiled Headrest - Small (3.5"X6")				
AC01-M		Profiled Headrest - Medium (4.5"X7")				
AC01-L		Profiled Headrest - Large (5.5"X8")		OTP		
AC28		Headrest mounting hardware with removable non folding stabilizer bar ¹		OTP		
1- Only avail	ilable with	push handles - Not available with a stroller handle or a folding stabilizer bar	1			
ACCESSORI	ES					
AC03		Anti-tippers		NC		
AC29		Swing-away anti-tipper ¹ Left D Right D		OTP		
AC27		Tip assist ²		OTP		
AC06		Cane and crutch holder Left D Right D				
AC07		Oxygen tank holder ⁴ - D and E Type - installed on the left				
AC08		Spoke guards ³ Available: 20", 22", 24", 26"				
AC09		Footrest neoprene impact guard (pair) - Black				
AC10		Seat pouch		OTP		
AC30		Newton multi-purpose pouch		OTP		
AC26		BodyPoint Mobility Bag		OTP		
AC23		Newton Backpack		OTP		
AC12		Velcro Closing Strap		OTP		
AC13		Tool kit		OTP		
AC16		W/S D W/M W/L D				
ACIO		M/S = M/M = M/L = M/XL = M/XXL = M/XXL =		OTP		

SIDE GUARDS (not available with "T" Armrest) SG01 Plastic side guards (removable) SG03 Carbon fiber side guards (removable) SG06 Plastic fender side guards - straight bracket (removable) SG08 Plastic fender side guards - offset bracket (removable)¹ Carbon fiber fender side guards (removable) SG04 SG99 Omit side guard

1- May have 1/2" adjustment restriction on both limits of the range; 2- May interfere with rigid back hardware; Only available with 18"-21" straight aluminum back canes; Not available with back upholstery; 3- Not available with locking flip-up armrest and short "T" armrest; 4- May have some restriction with seat-to-floor height and rear wheel

	Armrests				
HEIGHT ADJ	HEIGHT ADJUSTABLE "T" ARMREST ¹				
AR13-610		10" Desk length armpad ⁴ 6" - 10"			NC
AR03-812		10" Desk length armpad 8" - 12"			NC
AR03-1014		10" Desk length armpad 10" - 14"			NC
AR14-610		14" Full length armpad ⁴ 6" - 10"			NC
AR04-812		14" Full length armpad 8" - 12"			NC
AR04-1014		14" Full length armpad 10" - 14"			NC
LOCKING FLIP-UP ARMREST ²					
AR07		Locking Flip-Up Armrest			NC
ARMREST OPTIONS					
AR12		14" Full Length armpad - Gel Ovation (pair) ³			OTP
AR99		Omit armrest			J

OTP

ОТР

OTP

OTP

OTP

OTP

OTP

OTP

OTP

NC

NC

OTP


OTP


OTP

OTP

OTP

OTP

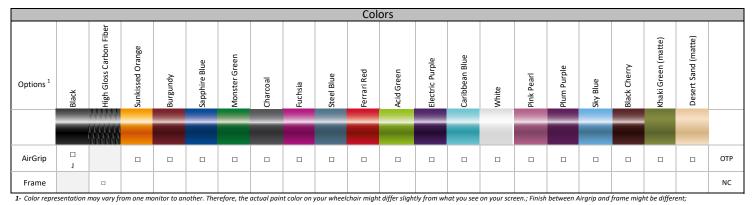

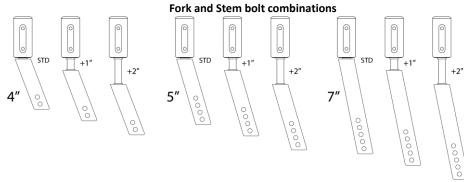

Unilateral wheel lock restrictions

Seat depth: shall be 16 in and greater					
Rear wheel: shall be 24 in and less					
"T" or flip-back armrest only compatible with 0° Camber					
One arm drive: Not compatible with "T" or flip-back armrest					
"T" or flip-back armrest may require to move the rear wheels outwards					
Not compatible with wheel lock lever extension					
	Seat depth (in)	COG Compatibility			
Rear wheel diameter		Range (in)			
20 in	16+	1.5 to 3.75			
	16	1.0 to 2.75			
22 in	17	1.0 to 3.25			
	18+	1.0 to 3.75			
	16	1.0 to 2.0			
24 in	17	1.0 to 2.75			
	18+	1.0 to 3.75			

Notes :